

# ASPROMUS®

## 2404B

Medical Spa Treatment Chair



Aspromus, a division of Silverfox

[www.aspromus.us](http://www.aspromus.us)

[info@silverfoxamerica.com](mailto:info@silverfoxamerica.com)



RoHS

# New Ultra-thin Base Series:

Defining a new aesthetic style

## 1 Easily Detachable



Modular design allows quick disassembly and cushion color replacement



Medical-grade, stain-resistant silicone leather for easy disinfection and cleaning



## 2 Trendelenburg Position

This position design fully prioritizes client comfort, surgical outcomes, and intraoperative safety.



## 3 Adjustable Ambient Lighting

Integrated multi-color adjustable ambient lighting enhances the customer experience.



## 4 Built-in Side Buttons

Fully illuminated side buttons ensure error-free operation.



## 5 Intelligent Memory System

Advanced smart memory and control system for effortless operation.




# Unparalleled User Experience



## Specifications

Voltage :	AC 100-120V or AC 220-240V
Frequency :	50 / 60Hz
Max load bearing :	200 kg / 440 lbs
Net weight:	110 kg / 243 lbs
Gross weight:	124 kg / 273 lbs
Package size:	1400x810x610 (mm)≈0.69m <sup>3</sup> 55.12x32x24 (in)≈36614in <sup>3</sup>
Product size(L*W*H) :	1810x859x570 / 820 (mm) 71.3x33.8x22.4 / 32.3 (in)

## Standard Configuration

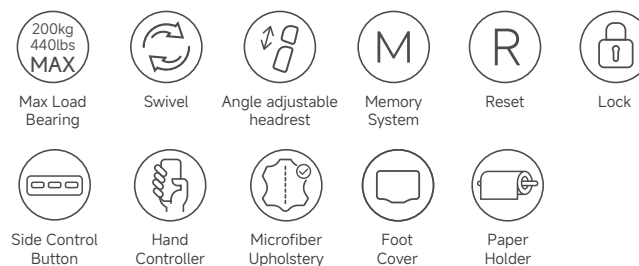


## Options



## Unit

mm / in

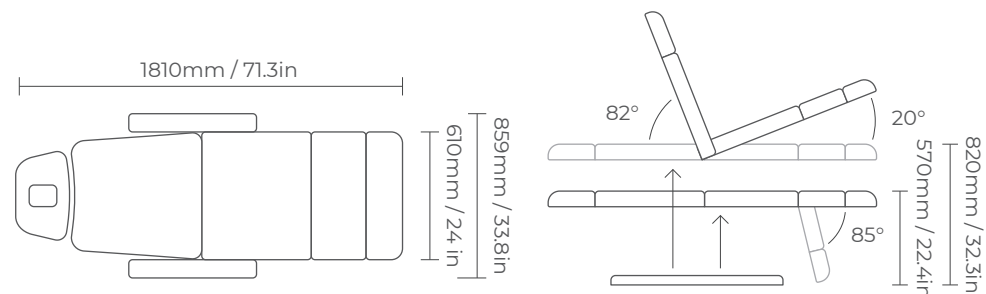



## ➤ Premium Silicone Upholstery

Full Grain



## ➤ Medical-grade, Stain-resistant Silicon Leather

Our silicone leather combines the premium feel of real leather with unmatched, easy-clean durability.

**Effortless Cleanup:** Simply wipe away everyday spills with mild soap and water. That's all it takes.

**Bleach-Safe:** Disinfect thoroughly with a diluted bleach solution (10%) to eliminate germs.

**Alcohol-Resistant:** Wipe down with 75% alcohol sanitizers for quick cleaning without damage.


## ➤ Sponge Dissection Diagram

Leather

Low Hardness Foam

High Firmness Foam

Laminate Support

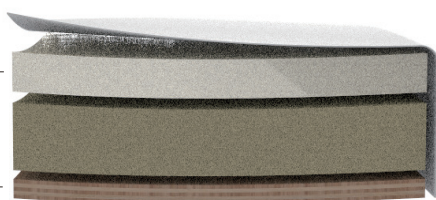

\*Actual colors may differ slightly from those displayed in images.

## ➤ Specifications

### •Material Composition

Surface: 100% Silicone  
Backing: Polyester

### •Inherent Flame Resistance

FMVSS 302  
BS5852 Crib 5

### •Color Fastness

Light AATCC16.3 200h: Grade 3-4  
Crocking AATCC8 Wet & Dry: Grade 5  
Perspiration AATCC15: Grade 5

### •Stain Resistance

CFFA-141,Excellent

### •Physical Performance

Wyzenbeek Abrasion:100,000 double rubs  
UV Stability ASTM D4329-05  
Flex Resistance ASTM D2097-91  
Hydrolysis Resistance ASTM D3690-02  
Cold Crack Resistance CFFA-6  
Salt Spray Resistance ASTM B117  
Low-temp Flex Resistance ISO 17694  
Odorless

### •Sustainability

VOCs Free  
Recyclable  
RoHS 2.0 / REACH / Prop 65  
Advanced Solvent Free Technology  
No Toxic By-products  
No Formaldehyde, Lead, PFC,Antimony Trioxide, Tri  
No Plasticizers, Phthalates,Heavy Metals, BPA  
No Harm to Air or Water

### •Biocompatibility

Repeated Stimulation: ISO 10993-10:2010 Level 0  
Sensitization: ISO 10993-10:2010 Level 0  
Cytotoxicity: ISO 10993-5:2009 Level 1

