

ASPROMUS[®]

2403EB

Medical Spa Treatment Chair



Aspromus, a division of Silverfox

www.aspromus.us

info@silverfoxamerica.com



RoHS

New Ultra-thin Base Series:

Defining a new aesthetic style

1 Easily Detachable



Modular design allows quick disassembly and cushion color replacement



Medical-grade, stain-resistant silicone leather for easy disinfection and cleaning



2 Trendelenburg Position

This position design fully prioritizes client comfort, surgical outcomes, and intraoperative safety.



3 Adjustable Ambient Lighting

Integrated multi-color adjustable ambient lighting enhances the customer experience.



4 Built-in Foot Controller and Side Buttons

Fully illuminated side buttons and built-in foot controller ensure error-free operation.



5 Intelligent Memory System

Advanced smart memory and control system for effortless operation.



Unparalleled User Experience



- Original Position
570mm / 22.4in



- Rotation
120°~120°

Specifications

Voltage :	AC 100-120V or AC 220-240V
Frequency :	50 / 60Hz
Max load bearing :	200 kg / 440 lbs
Net weight:	112 kg / 247 lbs
Gross weight:	124.8 kg / 275 lbs
Package size:	1400x810x610 (mm)≈0.69m ³ 55.12x32x24 (in)≈36614in ³
Product size(L*W*H) :	1820x860x570 / 840 (mm) 71.7x33.9x22.4 / 33 (in)

Standard Configuration



Max Load
Bearing



Swivel



Angle adjustable
headrest



Memory
System



Reset



Lock



Medical
Headrest



Side Control
Button



Built-in
Foot Controller



Hand
Controller



Microfiber
Upholstery



Foot
Cover




Paper
Holder

Options

Unit

mm / in

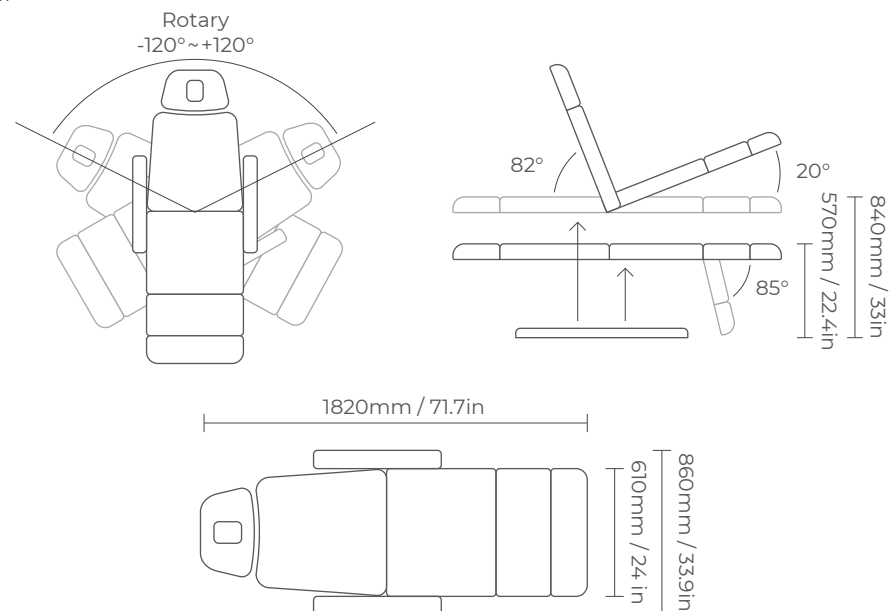

➤ Premium Silicone Upholstery

Full Grain



➤ Medical-grade, Stain-resistant Silicon Leather

Our silicone leather combines the premium feel of real leather with unmatched, easy-clean durability.

Effortless Cleanup: Simply wipe away everyday spills with mild soap and water. That's all it takes.

Bleach-Safe: Disinfect thoroughly with a diluted bleach solution (10%) to eliminate germs.

Alcohol-Resistant: Wipe down with 75% alcohol sanitizers for quick cleaning without damage.


➤ Sponge Dissection Diagram

Leather

Low Hardness Foam

High Firmness Foam

Laminate Support

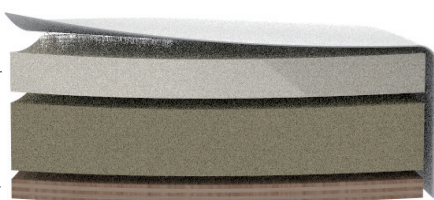

*Actual colors may differ slightly from those displayed in images.

➤ Specifications

•Material Composition

Surface: 100% Silicone
Backing: Polyester

•Inherent Flame Resistance

FMVSS 302
BS5852 Crib 5

•Color Fastness

Light AATCC16.3 200h: Grade 3-4
Crocking AATCC8 Wet & Dry: Grade 5
Perspiration AATCC15: Grade 5

•Stain Resistance

CFFA-141,Excellent

•Physical Performance

Wyzenbeek Abrasion:100,000 double rubs
UV Stability ASTM D4329-05
Flex Resistance ASTM D2097-91
Hydrolysis Resistance ASTM D3690-02
Cold Crack Resistance CFFA-6
Salt Spray Resistance ASTM B117
Low-temp Flex Resistance ISO 17694
Odorless

•Sustainability

VOCs Free
Recyclable
RoHS 2.0 / REACH / Prop 65
Advanced Solvent Free Technology
No Toxic By-products
No Formaldehyde, Lead, PFC,Antimony Trioxide, Tri
No Plasticizers, Phthalates,Heavy Metals, BPA
No Harm to Air or Water

•Biocompatibility

Repeated Stimulation: ISO 10993-10:2010 Level 0
Sensitization: ISO 10993-10:2010 Level 0
Cytotoxicity: ISO 10993-5:2009 Level 1

