

ASPROMUS[®]

2406EB

Medical Spa Treatment Chair



Aspromus, a division of Silverfox

www.aspromus.us

info@silverfoxamerica.com



RoHS

New Ultra-thin Base Series:

Defining a new aesthetic style

1 Easily Detachable



Modular design allows quick disassembly and cushion color replacement



Medical-grade, stain-resistant silicone leather for easy disinfection and cleaning



2 Dual-Stage Lift

Achieve precise positioning thanks to an innovative dual-stage lift, which expands the bed's height range from 23 to 38 inches (58.5–97.5 cm) for ultimate operational adaptability.

3 Trendelenburg Position

This position design fully prioritizes client comfort, surgical outcomes, and intraoperative safety.



4 Adjustable Ambient Lighting

Integrated multi-color adjustable ambient lighting enhances the customer experience.



5 Built-in Foot Controller and Side Buttons

Fully illuminated side buttons and built-in foot controller ensure error-free operation.



6 Intelligent Memory System

Advanced smart memory and control system for effortless operation.




Unparalleled User Experience



Specifications

Voltage :	AC 100-120V or AC 220-240V
Frequency :	50 / 60Hz
Max load bearing :	200 kg / 440 lbs
Net weight:	125.5 kg / 276.7 lbs
Gross weight:	146.5 kg / 323 lbs
Package size:	1460x810x640 (mm)≈0.76m ³ 57.5x32x25 (in)≈46378in ³
Product size(L*W*H) :	1810x859x595 / 980 (mm) 71.3x33.8x23.4 / 38.6 (in)

Standard Configuration


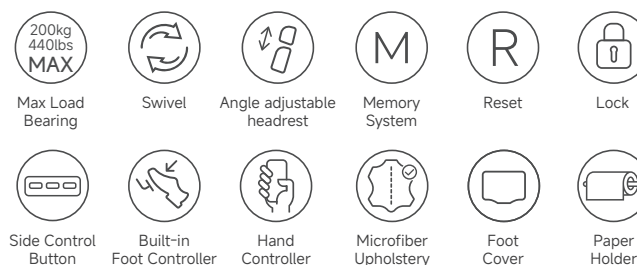


Options



Unit

mm / in

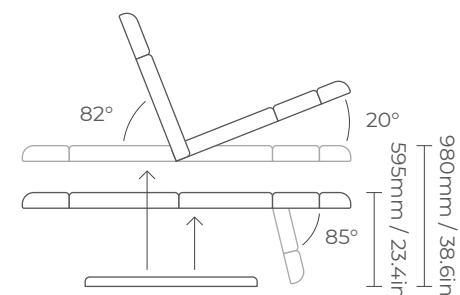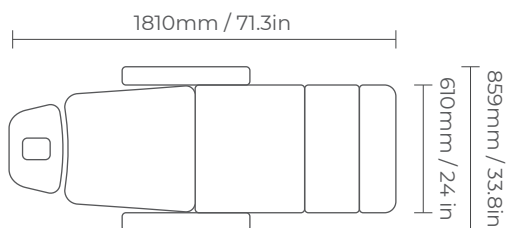

↗ Premium Silicone Upholstery

Full Grain



↗ Medical-grade, Stain-resistant Silicon Leather

Our silicone leather combines the premium feel of real leather with unmatched, easy-clean durability.

Effortless Cleanup: Simply wipe away everyday spills with mild soap and water. That's all it takes.

Bleach-Safe: Disinfect thoroughly with a diluted bleach solution (10%) to eliminate germs.

Alcohol-Resistant: Wipe down with 75% alcohol sanitizers for quick cleaning without damage.


↗ Sponge Dissection Diagram

Leather

Low Hardness Foam

High Firmness Foam

Laminate Support

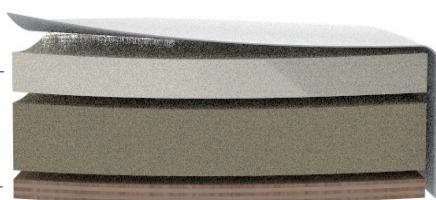

*Actual colors may differ slightly from those displayed in images.

↗ Specifications

•Material Composition

Surface: 100% Silicone
Backing: Polyester

•Inherent Flame Resistance

FMVSS 302
BS5852 Crib 5

•Color Fastness

Light AATCC16.3 200h: Grade 3-4
Crocking AATCC8 Wet & Dry: Grade 5
Perspiration AATCC15: Grade 5

•Stain Resistance

CFFA-141,Excellent

•Physical Performance

Wyzenbeek Abrasion:100,000 double rubs
UV Stability ASTM D4329-05
Flex Resistance ASTM D2097-91
Hydrolysis Resistance ASTM D3690-02
Cold Crack Resistance CFFA-6
Salt Spray Resistance ASTM B117
Low-temp Flex Resistance ISO 17694
Odorless

•Sustainability

VOCs Free
Recyclable
RoHS 2.0 / REACH / Prop 65
Advanced Solvent Free Technology
No Toxic By-products
No Formaldehyde, Lead, PFC,Antimony Trioxide, Tri
No Plasticizers, Phthalates,Heavy Metals, BPA
No Harm to Air or Water

•Biocompatibility

Repeated Stimulation: ISO 10993-10:2010 Level 0
Sensitization: ISO 10993-10:2010 Level 0
Cytotoxicity: ISO 10993-5:2009 Level 1

